

DIPSTICK INSTRUCTIONS

APPLICABLE: [2009–2019] MODELS NOT EQUIPPED WITH A DIPSTICK

Oil Level, Checking with Dipstick #AU 40178


- Minimum engine oil temperature 140° F (60° C)
- Vehicle must be in a level position
- After stopping the engine, wait a few minutes to allow the oil to flow back into the oil pan

Marking Field on the Dipstick #AU40178

- Adjust value on #AU40178 on the upper scale (see **arrows**) by loosening the knurled screw and moving the bottom of adjusting ring to the position shown on chart below. Tighten knurled screw.
- Insert oil level dipstick #AU40178 into oil dipstick tube until adjusting ring stops at the top of the tube
- Read value on scale at the end of the dipstick



Year	Model/Engine	Adjusting Value on the Upper Adjusting Ring	Minimum Oil Level on the Lower Scale	Maximum Oil Level on the Lower Scale
[2019]	A4 2.0L Turbo (CYMC engine)	60	0	16
[2020]	A4 Allroad 2.0L Turbo (CYMC engine)	60	0	16
[2009–2012]	2.0L (TFSI) and 2.0L (TFSI Hybrid) (CAEB, CAED, CDHA, CDHB, CDNB, CDNC and CFKA engines.) [Version 1]	39	0	24
[2017]	A4 2.0L Turbo (CYNB engine)	32	0	27
[2013–2015]	A4, A5, Q5 (CPMA and CPMB engine) 2.0L (TFSI)	32	0	27
[2013]	A4, S4 3.0L (TFSI)	123	0	22
[2009–2012]	A4, S4, A5 3.0L (TFSI) and 3.2L (FSI)	132	0	13
[2013–2015]	S6, S7 4.0L (TFSI)	185	0	24
[2012–2014]	A8 4.0L (TFSI) (4H body) (CEUA)	185	0	21
[2011–2012]	A8 4.2L (FSI) (4H body)	168	0	20
[2019]	Audi Q7 3.0L Supercharged V6 (CREC)	141	0	11
[2013–2015]	Audi RS 5 4.2L (FSI) (8T and 8F cabriolet)	196	0	18
[2019]	Audi S4 3.0l Supercharged V6 (CWGD) and SQ5 3.0L Supercharged V6 (CWGD)	76	0	16
[2009–2012]	Audi S5 4.2L (FSI) (8T body)	178	0	23
[2015]	Porsche Cayenne V6 Diesel (CNRB)	60	1	17
[2011-2014]	Porsche Cayenne Hybrid 3.0L Supercharged V6	102	16	27
[2014]	VW Touareg 3.6L V6	16	0	21

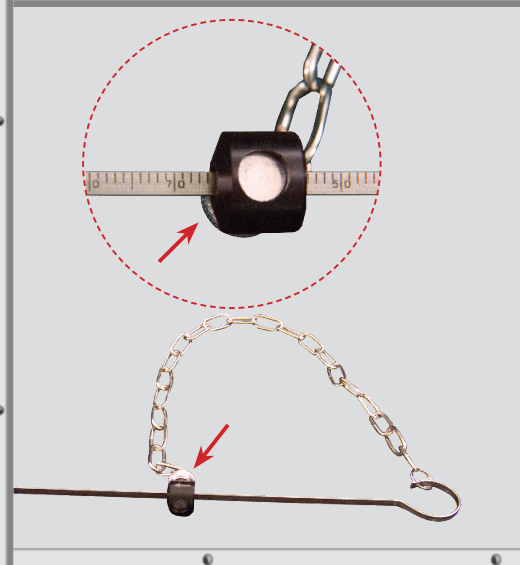

Euro 1/4 Turn Oil Filler
#OFAUD1000