

FLEXEEL® REINFORCED POLYURETHANE STRAIGHT AIR HOSE

Flexeel polyurethane reinforced hose offers an excellent alternative to bulkier rubber hoses. It is extremely lightweight and tough, and is ideal for either outdoor road service use or indoor body shop use. Flexeel retains its flexibility even in cold environments. The reinforced construction eliminates the possibility of having the various layers separate due to constant expansion and contraction during pulsating operations. Flexeel is available with reusable strain relief fittings.

Features:

- Retains flexibility in subzero temperatures.
- UV stabilized for a longer outdoor service life.
- Easy to wrap and store.
- Resistant to lubricating oils, greases and abrasion.
- Strain relief ends incorporate a built-in reusable fitting, which make these hoses field-repairable. The fitting provides an extremely tight bend radius, giving the user a greater range of motion, extending the life of the hose and virtually eliminating the possibility of kinking.



Hose I.D.	Hose O.D.	Temperature Range	Working Pressure at 70° F
1/4"	3/8"	- 40° F to 165° F	200 PSI
5/16"	.473"	- 40° F to 165° F	200 PSI
3/8"	9/16"	- 40° F to 165° F	200 PSI
.440"	.700"	- 40° F to 165° F	200 PSI

Color Code	
Transparent Red	TR
Transparent Yellow	TY

Transparent blue is standard color. For red or yellow, use color code.

See page 32 for replacement fittings.



I.D.	Length	Fitting	Model
1/4"	25'	1/4" MPT	A750DD25 Color
1/4"	50'	1/4" MPT	A750DD50 Color
1/4"	100'	1/4" MPT	A750DD100 Color
1/4"	500'	No Fittings (reel)	A750D500 Color
5/16"	25'	1/4" MPT	A750ED25 Color
5/16"	50'	1/4" MPT	A750ED50 Color
5/16"	100'	1/4" MPT	A750ED100 Color
5/16"	500'	No Fittings (reel)	A750E500 Color
3/8"	25'	1/4" MPT	A750FD25 Color
3/8"	25'	3/8" MPT	A750FF25 Color
3/8"	35'	1/4" MPT	A750FD35 Color
3/8"	35'	3/8" MPT	A750FF35 Color
3/8"	50'	1/4" MPT	A750FD50 Color
3/8"	50'	3/8" MPT	A750FF50 Color
3/8"	100'	1/4" MPT	A750FD100 Color
3/8"	100'	3/8" MPT	A750FF100 Color
3/8"	200'	No Fittings (reel)	A750F200 Color
1/2"	25'	1/2" MPT	A750HH25
1/2"	50'	1/2" MPT	A750HH50
1/2"	100'	1/2" MPT	A750HH100
1/2"	500'	No Fittings (reel)	A750H500


FLEXEEL® REINFORCED POLYURETHANE COILED AIR HOSE

This hose has excellent coil memory, a very small bend radius, a tight coil diameter and up to 90% working length. The 8" supply end and 16" working end pigtails eliminate the need for a whip hose. Withstands 200 PSI working pressure.

Transparent blue is standard color. For red or yellow, use color code.

Color Code	
Transparent Red	TR
Transparent Yellow	TY

I.D.	Length	Fitting	Retracted Length	Model
1/4"	10'	1/4" MPT	9"	A751ADD10 Color
1/4"	15'	1/4" MPT	14.5"	A751ADD15 Color
1/4"	25'	1/4" MPT	26.5"	A751ADD25 Color
5/16"	25'	1/4" MPT	26.5"	A751AED25 Color
3/8"	15'	3/8" MPT	16.7"	A751AFF15 Color
3/8"	25'	3/8" MPT	29"	A751AFF25 Color

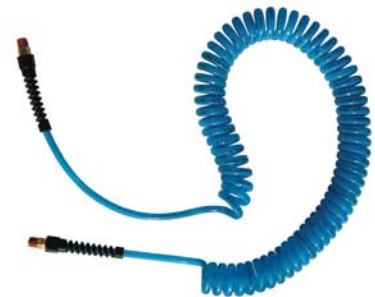

FLEXREEL HOSE REEL

FlexReel offers a neat and compact storage solution for your Flexeel hose. The reel is constructed of steel and powder coated to resist corrosion. Multiple mounting accessories available.

Transparent blue is standard color. For red or yellow, use color code.

Color Code	
Transparent Red	TR
Transparent Yellow	TY

Hose I.D.	Fitting Size	Hose Length	Model
1/4"	1/4"	100'	A753D100 Color
1/4"	1/4"	200'	A753D200 Color
5/16"	1/4"	100'	A753E100 Color
5/16"	1/4"	150'	A753E150 Color
3/8"	3/8"	100'	A753F100 Color



Hand Carry Caddy (A753HC)

Stud Wall Plate (A753WP)



To order, call 732-432-7177.