



Utility High Pressure Pump

Light and effective double acting high pressure air operated pumps specially designed for use in small mobile and portable greasing units.

Pumps are available with three different suction tube lengths: 35 lb, 120 lb and 400 lb. They include a height adjustable 2" NPT(M) bung adaptor.

Reliable air motor

Well proven air motor with 3" effective piston diameter air motor, minimum air consumption

Double acting pump

Provides even and smooth fluid flow

Long life packings

Low friction, dual packing step-seals provides longer trouble-free operation

High quality materials



Barrel, piston and foot valve are made of hardened, precision fitted ground steel for perfect seal and long life

MARKETS SERVED

- Agriculture
- Service shops
- Light industrial

FLUIDS HANDLED

- Grease up to NLGI-2

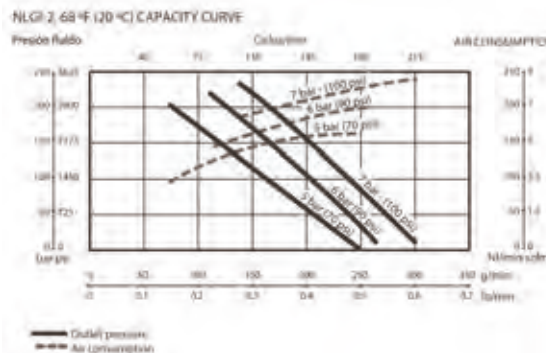

IN(MM)	300	302	304
A	24" (610)	36 1/2" (925)	44" (1.120)
B	8" (200)	8" (200)	8" (200)
C	1" (26)	1" (26)	1" (26)
D	16" (410)	28 1/2" (725)	36" (920)