



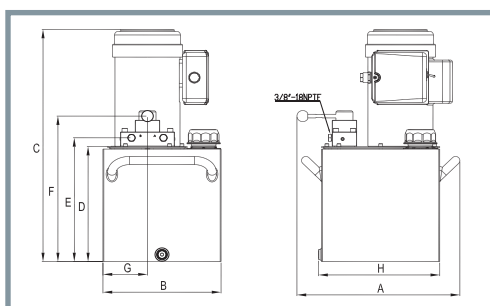

ELECTRIC PUMPS WITH PENDANT SWITCH

- Quiet operation meets OSHA regulations (80dBA)
- 2 speed operation allows for faster cylinder advance
- Full load starting capacities
- Internal filter keeps contamination from damaging pump
- 10 foot hand held remote control allows user to control cylinder in up or down position

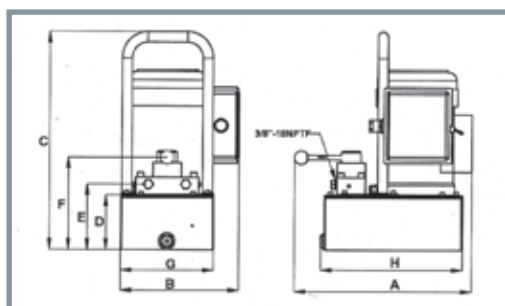

ELECTRIC PUMP WITH SOLENOID VALVE SPECIFICATIONS

Used with Cylinder	Motor Size	Usable Oil Capacity	Product Code	Pressure Rating		Oil Output Flow Rate		Valve Type	Valve Function	Current Draw	Motor Voltage	Weight
	(hp)	(gal)		1st Stage (psi)	2nd Stage (psi)	1st Stage (in³/min)	2nd Stage (in³/min)			(amps)	(volts)	(lbs)
Single Acting	0.5	1.0	5E05H1GR	350	10,000	293	18	3-way, 3-position	Advance/ Hold/ Return	9	115	59.5
	1.0	2.0	5E10H2GR	700		397	37			12		70.5
	1.5	3.0	5E15H3GR			476	61			17		88.5

ELECTRIC PUMP WITH SOLENOID VALVE DIMENSIONS

Product Code	Dimensions (in)							H
	A	B	C	D	E	F	G	
5E05H1GR	14.92	10.28	19.10	4.72	5.67	7.99	8.07	12.36
5E10H2GR	16.65	12.01	17.83	5.94	6.89	9.21	4.53	12.36
5E15H3GR	16.65	12.01	19.72	7.24	8.19	10.51	4.53	12.36