




ELECTRIC PUMPS WITH SOLENOID VALVE

- Quiet operation meets OSHA regulations (80dBA)
- Ideal for applications where a remote control is required
- 2 speed operations allows for faster cylinder advance
- Full load starting capabilities
- Internal filter keeps contamination from damaging pump
- 10 foot hand held remote controls the solenoid valve

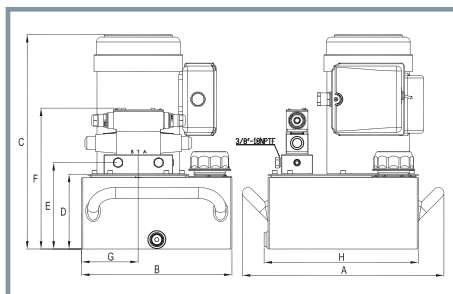

ELECTRIC PUMP WITH SOLENOID VALVE SPECIFICATIONS

Used with Cylinder	Motor Size	Usable Oil Capacity	Product Code	Pressure Rating		Oil Output Flow Rate		Valve Type	Valve Function	Current Draw	Motor Voltage	Weight		
	(hp)	(gal)		1st Stage (psi)	2nd Stage (psi)	1st Stage (in³/min)	2nd Stage (in³/min)			(amps)	(volts)	(lbs)		
Single Acting	0.5	1	5ES05H1G	350	10,000	293	18	3-way, 3-position	Advance/ Hold/ Return	9	115	61.5		
		2	5ES05H2G										65.3	
	1	2	5ES10H2G	700		311	37					12	72.6	
		1.5	3			5ES15H3G	470			61		17	90.4	
	5		5ES15H5G											98
Double Acting	0.5	1	5ES05H1GR	350		293	18	4-way, 3-position				9		61.5
		2	5ES05H2GR											
	1	2	5ES10H2GR	700		311	37					12		72.6
		1.5	3											5ES15H3GR
	5		5ES15H5GR									98		

ELECTRIC PUMP WITH SOLENOID VALVE DIMENSIONS

Product Code	Dimensions (in)							
	A	B	C	D	E	F	G	H
5ES05H1G	12.74	10.26	19.10	4.72	5.65	10.00	8.07	12.32
5ES05H2G	12.74	10.26	19.10	4.72	5.65	10.00	8.07	12.32
5ES10H2G	17.88	12.01	17.88	5.98	6.90	11.26	4.51	12.32
5ES15H3G	17.88	12.01	17.88	5.98	6.90	11.26	4.51	12.32
5ES15H5G	16.10	12.01	17.13	5.98	6.90	11.26	4.51	12.32
5ES05H1GR	16.10	12.01	17.13	5.98	6.90	11.26	4.51	12.32
5ES05H2GR	16.10	12.01	19.78	7.28	8.20	12.56	4.51	12.32
5ES10H2GR	16.10	12.01	19.78	7.28	8.20	12.56	4.51	12.32
5ES15H3GR	16.10	12.01	24.78	12.28	13.20	17.56	4.51	12.32
5ES15H5GR	16.10	12.01	24.78	12.28	13.20	17.56	4.51	12.32