




**JHW6C10T04**  
**10T Single Acting Cylinders 4"**  
**Stroke 3/8"**



## PRODUCT DETAILS

- 39 models
- Internal plunger threads
- Snap in grooved saddles
- Rod wiper seals out dirt and contamination
- Collar fixture threads
- Two base mounting holes on most models
- Our most rugged, high torque capacity ratchet

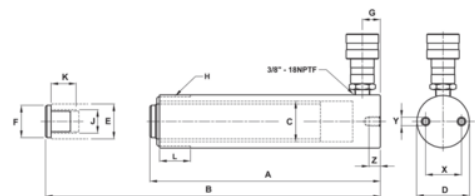

PRODUCT ATTRIBUTES

Product: **JHW6C10T04**

|                                                                                   |             |                                                                                   |                      |                                                                                   |                |
|-----------------------------------------------------------------------------------|-------------|-----------------------------------------------------------------------------------|----------------------|-----------------------------------------------------------------------------------|----------------|
|  | 10 t        |  | 4.02 in              |  | 2.26 in        |
| <b>PSI</b>                                                                        | 8930 psi    |  | 9.00 in <sup>3</sup> | <b>A</b>                                                                          | 6.85 in        |
| <b>B</b>                                                                          | 10.87 in    | <b>C</b>                                                                          | 1.69 in              | <b>D</b>                                                                          | 2.26 in        |
| <b>E</b>                                                                          | 1.49 in     | <b>F</b>                                                                          | 1.38 in              | <b>G</b>                                                                          | 0.77 in        |
| <b>H</b>                                                                          | 2-1/4-14 in | <b>L</b>                                                                          | 1.3 in               | <b>J</b>                                                                          | 1"-8UNC in     |
| <b>K</b>                                                                          | 1.3 in      | <b>X</b>                                                                          | 1.56 in              | <b>Y</b>                                                                          | 5/16"-18UNC in |
| <b>Z</b>                                                                          | 0.55 in     |                                                                                   |                      |                                                                                   |                |