




**JHW6C15T01**  
**15T Single Acting Cylinders 1"**  
**Stroke 3/8"**



## PRODUCT DETAILS

- 39 models
- Internal plunger threads
- Snap in grooved saddles
- Rod wiper seals out dirt and contamination
- Collar fixture threads
- Two base mounting holes on most models
- Our most rugged, high torque capacity ratchet

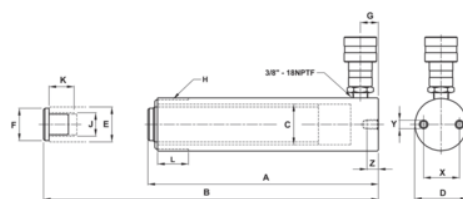

PRODUCT ATTRIBUTES

Product: **JHW6C15T01**

|                                                                                   |             |                                                                                   |                      |                                                                                   |               |
|-----------------------------------------------------------------------------------|-------------|-----------------------------------------------------------------------------------|----------------------|-----------------------------------------------------------------------------------|---------------|
|  | 15 t        |  | 0.99 in              |  | 3.14 in       |
| <b>PSI</b>                                                                        | 9550 psi    |  | 3.11 in <sup>3</sup> | <b>A</b>                                                                          | 4.88 in       |
| <b>B</b>                                                                          | 5.87 in     | <b>C</b>                                                                          | 2 in                 | <b>D</b>                                                                          | 2.75 in       |
| <b>E</b>                                                                          | 1.63 in     | <b>F</b>                                                                          | 1.5 in               | <b>G</b>                                                                          | 0.98 in       |
| <b>H</b>                                                                          | 2-3/4-16 in | <b>L</b>                                                                          | 1.18 in              | <b>J</b>                                                                          | 1"-8UNC in    |
| <b>K</b>                                                                          | 0.98 in     | <b>X</b>                                                                          | 1.88 in              | <b>Y</b>                                                                          | 3/8"-16UNC in |
| <b>Z</b>                                                                          | 0.51 in     |                                                                                   |                      |                                                                                   |               |