




**JHW6C55T06**  
**55T Single Acting Cylinders 6"**  
**Stroke 3/8"**



## PRODUCT DETAILS

- 39 models
- Internal plunger threads
- Snap in grooved saddles
- Rod wiper seals out dirt and contamination
- Collar fixture threads
- Two base mounting holes on most models
- Our most rugged, high torque capacity ratchet

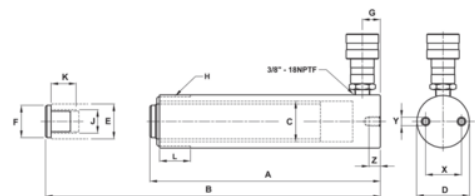

PRODUCT ATTRIBUTES

Product: **JHW6C55T06**

|                                                                                   |           |                                                                                   |                       |                                                                                   |               |
|-----------------------------------------------------------------------------------|-----------|-----------------------------------------------------------------------------------|-----------------------|-----------------------------------------------------------------------------------|---------------|
|  | 55 t      |  | 6.22 in               |  | 10.99 in      |
| <b>PSI</b>                                                                        | 10000 psi |  | 68.36 in <sup>3</sup> | <b>A</b>                                                                          | 11.14 in      |
| <b>B</b>                                                                          | 17.36 in  | <b>C</b>                                                                          | 3.74 in               | <b>D</b>                                                                          | 5 in          |
| <b>E</b>                                                                          | 3.15 in   | <b>F</b>                                                                          | 2.76 in               | <b>G</b>                                                                          | 1.22 in       |
| <b>H</b>                                                                          | 5-12 in   | <b>L</b>                                                                          | 2.17 in               | <b>J</b>                                                                          |               |
| <b>K</b>                                                                          |           | <b>X</b>                                                                          | 3.75 in               | <b>Y</b>                                                                          | 1/2"-13UNC in |
| <b>Z</b>                                                                          | 0.75 in   |                                                                                   |                       |                                                                                   |               |