




**JHW6CD100T13**  
**100T Double-Act Cylinder 13"**  
**Stoke**



**PRODUCT DETAILS**

- Rod wiper seals out dirt and contamination
- High strength steel construction from gun drilled solid bar
- High flow 3/8" NPTF couplers
- One piece high grade alloy bearing for side load protection and long life
- Ideal for pushing and pulling
- Maximum working pressure: 1, psi / 7 bar

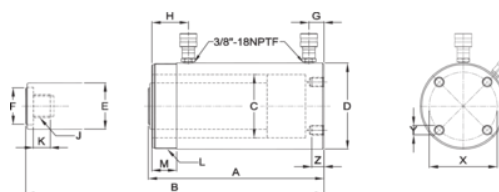

PRODUCT ATTRIBUTES

Product: **JHW6CD100T13**

|                                                                                   |                       |                                                                                   |                      |                                                                                   |                        |
|-----------------------------------------------------------------------------------|-----------------------|-----------------------------------------------------------------------------------|----------------------|-----------------------------------------------------------------------------------|------------------------|
|  | 100 t                 |  | 13.11 in             | <b>A</b>                                                                          | 20.63 in               |
| <b>B</b>                                                                          | 33.74 in              | <b>C</b>                                                                          | 5.12 in              | <b>D</b>                                                                          | 6.97 in                |
| <b>E</b>                                                                          | 3.75 in               | <b>F</b>                                                                          | 2.95 in              | <b>G</b>                                                                          | 1.22 in                |
| <b>H</b>                                                                          | 2.95 in               | <b>L</b>                                                                          | 6-7/8-12 in          | <b>M</b>                                                                          | 1.97 in                |
| <b>K</b>                                                                          | 1.38 in               | <b>X</b>                                                                          | 5.47 in              | <b>Y</b>                                                                          | 3/4"-10UNC in          |
| <b>Z</b>                                                                          | 0.98 in               |  | 104.4 t              |  | 48.6 t                 |
|  | 20.57 in <sup>2</sup> |  | 9.58 in <sup>2</sup> |  | 269.66 in <sup>3</sup> |
|  | 125.58 in             |  | 193.6 lb             |                                                                                   |                        |