


Stainless Steel Hose Reels

Air/Water/Oil - 3/8", 1/2", 3/4", 1" I.D.

- Electropolished 304L stainless steel
- Ideal for applications where the harsh environment requires the use of stainless steel hose reels
- Stainless steel components offer the maximum protection from premature corrosion
- Swivel includes FKM O-rings



7800 OLS

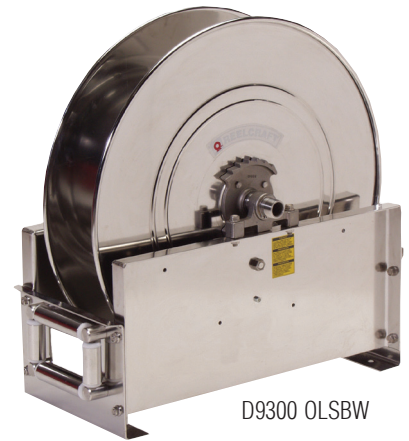

D9300 OLSBW

See page 33 for Stainless Steel Cord Reels

Spring Retractable Reels Note: Standard latch parts are made from aluminum. Series 80000 and D80000 stainless reels have an aluminum fluid path. Stainless latch parts and fluid path are available in the -S part numbers (example: OLS-S).

Manual Crank Reels Note: The -S models include all stainless steel hubs and bushings and are ideal for high humidity and corrosive environments. Refer to reelcraft.com for stainless steel models with aluminum hubs and bronze bushings.

Model without hose & bumper	Shipping Weight		Hose Capacity				Max Pressure		NPT(F) Reel Inlet		NPT(F) Reel Outlet		Size Index Page	Size Index #
	lbs	kg	I.D.		O.D.		psi	bar	in		in			
Spring Retractable Low Pressure Air/Water Reels														
Maximum Temperature 210 °F (99 °C)														
5600 OLS	22	10	3/8	10	.600	15	35	11	500	35	3/8	3/8	10	1
5600 OLS-S	22	10	3/8	10	.600	15	35	11	500	35	3/8	3/8	10	1
7800 OLS	41	19	1/2	13	.750	19	50	15	500	35	1/2	1/2	12	---
7800 OLS-S	41	19	1/2	13	.750	19	50	15	500	35	1/2	1/2	12	---
82000 OLS	81	37	1/2	13	.750	19	100	30	500	35	1/2	1/2	14	1
82000 OLS-S	81	37	1/2	13	.750	19	100	30	500	35	1/2	1/2	14	1
83000 OLS	81	37	3/4	19	1.188	30	50	15	500	35	3/4	3/4	14	1
83000 OLS-S	81	37	3/4	19	1.188	30	50	15	500	35	3/4	3/4	14	1
D83000 OLS	84	38	3/4	19	1.188	30	75	23	500	35	3/4	3/4	14	2
D83000 OLS-S	84	38	3/4	19	1.188	30	75	23	500	35	3/4	3/4	14	2
D9300 OLSBW	116	53	3/4	19	1.188	30	75	23	500	35	3/4	3/4	16	1
D9300 OLSBW-S	116	53	3/4	19	1.188	30	75	23	500	35	3/4	3/4	16	1
D84000 OLS	92	42	1	25	1.375	35	50	15	500	35	1	1	14	3
D84000 OLS-S	92	42	1	25	1.375	35	50	15	500	35	1	1	14	3
D9400 OLSBW	117	53	1	25	1.375	35	50	15	500	35	1	1	16	1
Spring Retractable Medium Pressure Oil Reels														
Maximum Temperature 210 °F (99 °C)														
5600 OMS	24	11	3/8	10	.710	18	30	9	3000	207	3/8	3/8	10	1
5600 OMS-S	24	11	3/8	10	.710	18	30	9	3000	207	3/8	3/8	10	1
7600 OMS55	42	19	3/8	10	.710	18	66	20	3000	207	3/8	3/8	12	---
7600 OMS55-S55	42	19	3/8	10	.710	18	66	20	3000	207	3/8	3/8	12	---
7800 OMS	43	20	1/2	13	.850	22	50	15	3000	207	1/2	1/2	12	---
7800 OMS-S	43	20	1/2	13	.850	22	50	15	3000	207	1/2	1/2	12	---
82000 OMS-S	83	38	1/2	13	.850	22	75	23	1500	103	1/2	1/2	14	1
83000 OMS	83	38	3/4	19	1.188	30	50	15	1250	86	3/4	3/4	14	1



HS18000 M-S

Hose Assemblies & Bumper Stops
See page 40

Interactive Reel Catalog
Visit reelcraft.com/catalog for complete product specifications, parts, and accessories.

Model without hose & bumper	Shipping Weight		Pressure		NPT(F) Outlet		NPT(F) Inlet		I.D.		O.D.		Size Index Page	Size Index #			
	lbs	kg	psi	bar	in		in		in		in						
Hand Crank Low/Medium Pressure Reels																	
Maximum temperature 210 °F (99 °C)																	
HS18000 M-S	36	16	3000	207	1/2	1/2	Hose Capacity	425	130	300	91	200	61	25	1		
HS19000 M-S	38	17	3000	207	3/4	3/4		425	130	300	91	200	61	75	23	25	1
HS37000 L	47	21	500	35	1 (M)	1		---	---	---	---	---	---	---	100	30	refer to reelcraft.com