

Screwdrivers & Nut Drivers

Cat. No.	Tip Type	Tip Size	Shank Length	Overall Length
Cushion-Grip Screwdrivers				
600-4	Keystone, Heavy-Duty Square Shank	1/4" (6 mm)	4" (102 mm)	8-11/32" (212 mm)
600-8		3/8" (10 mm)	8" (203 mm)	13-7/16" (341 mm)
601-4		Cabinet, Round Shank	3/16" (5 mm)	4" (102 mm)
601-6	3/16" (5 mm)		6" (152 mm)	9-3/4" (248 mm)
602-4	Keystone, Heavy-Duty Round Shank	1/4" (6 mm)	4" (102 mm)	8-11/32" (212 mm)
602-6		5/16" (8 mm)	6" (152 mm)	10-15/16" (278 mm)
603-3	Phillips, Round Shank	#1	3" (76 mm)	6-3/4" (171 mm)
603-4		#2	4" (102 mm)	8-5/16" (211 mm)
603-6		#3	6" (152 mm)	11" (279 mm)
Plastic Handle Screwdrivers				
A216-4	Cabinet, Round Shank	1/8" (3 mm)	4" (102 mm)	7" (178 mm)
Cat. No.	Size	Shank Length	Color Code	Overall Length
Cushion-Grip Nut Drivers				
630-1/4	1/4"	3" (76 mm)	Red	6-3/4" (172 mm)
630-3/16	3/16"	3" (76 mm)	Black	6-3/4" (172 mm)
630-3/8	3/8"	3" (76 mm)	Blue	6-3/4" (172 mm)
630-5/16	5/16"	3" (76 mm)	Yellow	6-3/4" (172 mm)
630-7/16	7/16"	3" (76 mm)	Brown	7-5/16" (186 mm)
630-1/2	1/2"	3" (76 mm)	Red	7-5/16" (186 mm)
Cat. No.	Size	Shank Length	Handle Color	Overall Length
Plastic Handle Nut Drivers				
S10-6M	5/16"	6" (152 mm)	Amber	9-5/8" (245 mm)
S12-6M	3/8"	6" (152 mm)	Blue	9-5/8" (245 mm)
S86M	1/4"	6" (152 mm)	Yellow	9-5/8" (245 mm)
Cat. No.	Shank Length	Overall Length		
Cushion-Grip Scratch Awl				
650	3-1/2" (89 mm)	7-7/8" (200 mm)		


Multi-Bit Screwdrivers/Nut Drivers & Sets

Cat. No.	Description	Contains
Cushion-Grip Handles		
85076	7-Piece Screwdriver Set	4" square-shank, keystone-tip, 6" round-shank, keystone-tip, 3" round-shank, cabinet-tip, 6" round-shank, cabinet-tip, 4" round-shank, #1 Phillips-tip, 3" round-shank, #1 Phillips-tip, 4" round-shank, #2 Phillips-tip
631	7-Piece Nut Driver Set	3/16", 1/4", 5/16, 11/32, 3/8", 7/16", 1/2" in 3" (76 mm) lengths
647	7-Piece Nut Driver Set	3/16", 1/4", 5/16, 11/32, 3/8", 7/16", 1/2" in 6" (152 mm) lengths
32581	4-in-1 Electronics Screwdriver	T7, T8, T10, T15 TORX®. 6-1/2" (165 mm) overall length
32614	4-in-1 Electronics Pocket Screwdriver	#0 and #00 Phillips plus 1/8" and 3/32" Slotted blade
32476	5-in-1 Screwdriver/Nut Driver	5/16" (8 mm) nut driver, #1 & #2 Phillips, 1/4" & 3/16" (7 mm & 5 mm) Slotted. 7-3/4" (197 mm) overall length
32807MAG	7-in-1 Multi-Nut Driver	1/4", 5/16", 11/32", 3/8", 1/2", 7/16" & 9/16" sizes. 9.5" (241 mm) overall length
32477	10-in-1 Screwdriver/Nut Driver	5/16" and 1/4" nut drivers, #1 & #2 Phillips, 1/4" & 3/16" Slotted, T10 and T15 TORX®, #1 & #2 square-recess. 7-3/4" (197 mm) overall length
32500	11-in-1 Screwdriver/Nut Driver	3/8", 5/16" & 1/4" nut drivers, #1 & #2 Phillips, 1/4" & 3/16" Slotted, T10 & T15 TORX®, #1 & #2 square-recess. 7-1/4" (184 mm) overall length
Insulated Handles		
32288	8-in-1 Insulated Interchangeable Screwdriver Set	Pouch, Handle, #2 Phillips Single-End Blade, 1/4" (6 mm) Slotted Single-End Blade, #1/ #2 square-recess Double-End Blade, #1 Phillips / 3/16" (5 mm) Slotted Double-End Blade, and #2 Phillips / 1/4" Slotted (6 mm) Double-End Blade
32286	2-in-1 Insulated Flip-Blade Screwdriver	#1 Phillips, 3/16" (5 mm) Slotted blade
32293	2-in-1 Insulated Flip-Blade Screwdriver	#2 Phillips, 1/4" (6 mm) Slotted blade
Plastic-Handles		
32460	4-in-1 Screwdriver	Phillips #1, #2; Cabinet; Slotted - 7-5/8" (194 mm) overall length
70035	Magnetic Screwdriver Set	#1, #2 Phillips, 3/16" & 9/32" (4.8 & 7.1 mm) Slotted - 3-7/16" overall length



Gloves

Description	Medium	Large	X-Large	XX-Large
Long-Cuff Gloves		40010	40012	
Cowhide Gloves with Thinsulate™	40016	40017	40018	
Cowhide Work Gloves	40021	40022		
Lineman Work Gloves	40080	40082	40084	40086
Journeyman™ Utility Gloves		40206	40207	
Journeyman™ Leather Gloves	40220	40221	40222	

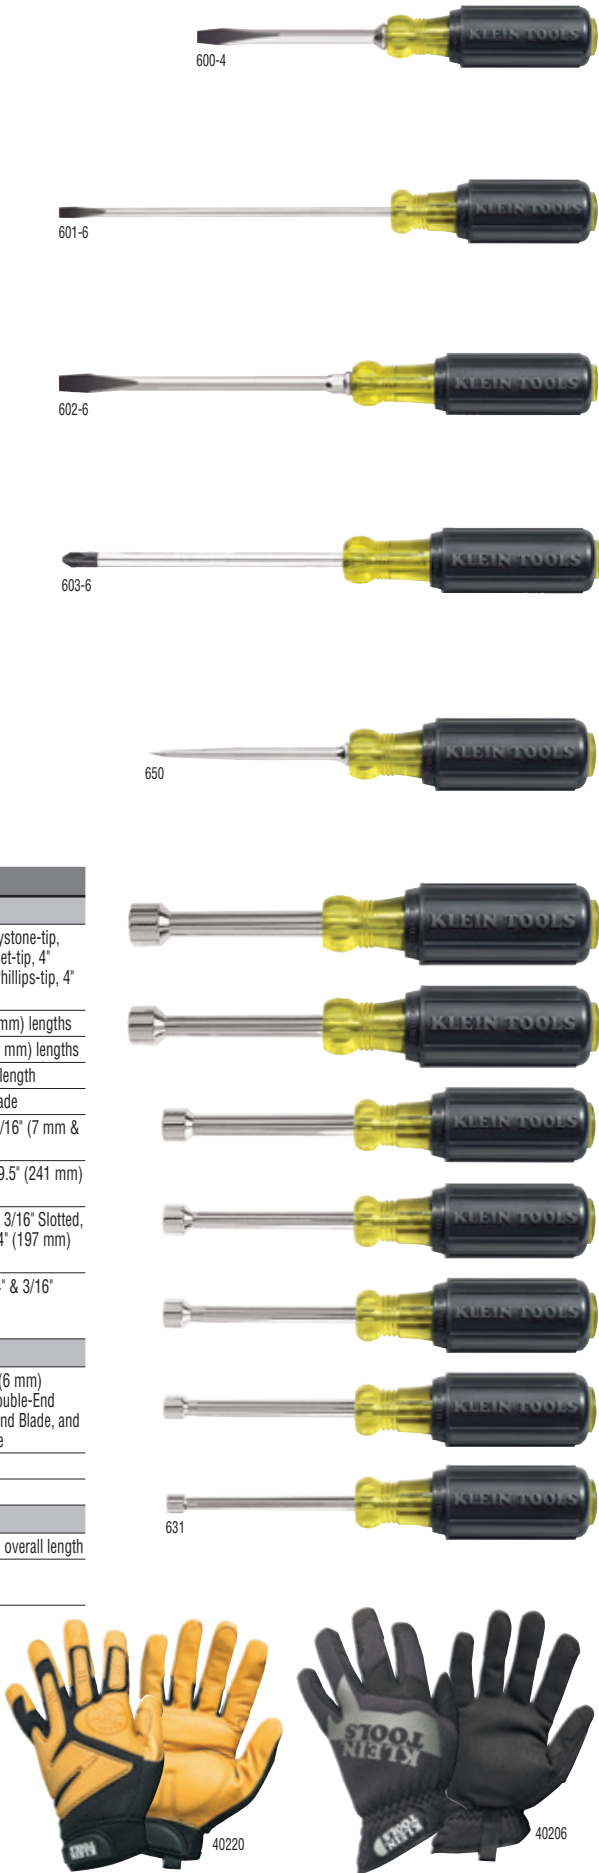

⚠WARNING: Not flameproof or fire retardant. DO NOT expose to open flame or sparks.

Test & Measurement

Cat. No.	Description	Functions	Included Accessories	Batteries	Safety Rating	Drop Protection
CL110	Digital Clamp Meter AC Auto-Ranging 400A	AC current via the clamp & AC/DC voltage, resistance and continuity via test-leads	Carrying Case, Test Leads, Batteries	3 x AAA	CAT III 600V	3.3 ft (1 m)
CL220	400A AC/DC Auto-Ranging Clamp Meter	TRMS, AC Current, NCVT, AC/DC Voltage, Resistance, Continuity and Temperature	Case, Test Leads, Thermocouple, Batteries	3 x AAA	CATIII 600V, Class 2, Double Insulation Safety Rating, CE Certified	6.6 ft (2 m)
CL390	Digital Clamp Meter, AC/DC Auto-Ranging 400 A	TRMS, AC/DC Current, NCVT, AC/DC Voltage, Resistance, DC Micro Amp, Frequency, Capacitance, Continuity, Duty Cycle, Diode Test, and Temperature	Case, Test Leads, Thermocouple, Batteries	3 x AAA	CATIII 600V, Class 2, Double Insulation Safety Rating, CE Certified	6.6 ft (2 m)
MM300	600V Manual-Ranging Multimeter	Manual-ranging, AC/DC voltage, DC current, resistance, test diode, continuity, battery test	Test Leads, Batteries	2 x AAA	CAT III 600V	3.3 ft (1 m)
MM400	600V Auto-Ranging Multimeter	Auto-ranging, AC/DC voltage, AC/DC current, resistance, temperature, capacitance, frequency, duty-cycle, diode test, continuity	Test Leads, Batteries, Thermocouple	2 x AAA	CAT III 600V	3.3 ft (1 m)
MM700	1000V AC/DC TRMS/Low Impedance Multimeter	Auto-ranging True Root-Mean-Squared (TRMS), AC/DC voltage, AC/DC current, and resistance, temperature, capacitance, frequency, duty-cycle, diode test, continuity	Case, Test Leads, Thermocouple, Batteries, Alligator Clips	2 x AAA	CAT IV 600V	6.6 ft (2 m)
IR2000A	12:1 Infrared Thermometer	Auto Scan -76° to 1022°F (-60° to 550°C) Max/ Min/Average/Differential	Case, K-type Thermocouple and Batteries	2 x AAA	N/A	6.6 ft (2 m)
IR5	Dual Laser Infrared Thermometer	Temperature: -22° to 752°F (-30° to 400°C), Auto-scan; max/min/ avg/diff	Pouch, Batteries	9V	N/A	6.6 ft (2 m)
RT210	GCFI Receptacle Tester	Diagnoses common wiring faults in standard grounded outlets	N/A	N/A	UL, SA, CE	6.6 ft (2 m)
69420	Heavy-Duty Alligator Clip Test Leads	Standard banana-type inputs compatible with most multimeters and clamp meters				

USB Digital Meters

Cat. No.	Description	Voltage	Current	Capacity Used	Energy Delivered	Resistance	Elapsed Time	USB Compatibility
ET900	USB-A Digital Meter (Type A)	3 to 20V DC	0.05 to 3 A	99,999mAh Maximum	999Wh Maximum	400 ohms Maximum	Up to 999 Hours, 59 Min, 59 Secs	USB-A; Qualcomm Quick Charge®
ET910	USB-A Digital Meter and Tester (Type A)							
ET920	USB-A/USB-C Digital Meter (Type A and C)		USB-A: 0.05 to 3A USB-C: 0.05 to 5A					USB-A, USB-C; Qualcomm Quick Charge®

Holemaking

Cat. No.	Description	Features
53001	15-Piece Regular-Point Drill-Bit Set	• 1/16" through 1/2" by 32nds drill bits • Hinged metal box with two stand-up bit holders
53716	Flex Bit Auger, 3/8" x 54" length	• Screw point tip pulls the bit through wood
53751	Flex Bit Auger, 3/4" x 54" length	• Hole in tip allows for use with wire or cable pulling grip

NOTE: Read and follow safety instructions in power tool owner's manual.

Saws & Blades

Cat. No.	Description	Blade Length	Overall Length
703	Magic-Slot Compass Saw	8" (203 mm)	13" (330 mm)
725	Jab Saw	6" (152 mm)	12" (305 mm)
31737	Folding Jab Saw	5.2" (132 mm)	11.9" (302 mm)
31734	Saw Blades for 18 Gauge Metal, 5-pack	6" (152 mm)	6" (152 mm)
702-12	High-Tension Hacksaw	12" (305 mm)	16-1/4" (413 mm)
1224BIP	Bi-Metal Blades, 10-pack for use with 702-12	12" (305 mm)	12" (305 mm)

Hammers, Chisels & Punches

Cat. No.	Description	Head Weight	Overall Length
807-18	Electrician's Straight-Claw Hammer	18 oz (510 g)	15" (381 mm)
808-16	Straight-Claw Hammer - Heavy-Duty	16 oz (454 g)	13" (330 mm)
832-32	Lineman's Straight-Claw Hammer	32 oz (907 g)	15" (381 mm)
809-36	Lineman's Double-Face Hammer	36 oz (1021 g)	14" (356 mm)
809-36MF	Lineman's Milled-Face Hammer	36 oz (1021 g)	14" (356 mm)
818-16	Curved-Claw Hammer - Heavy-Duty	16 oz (454 g)	13" (330 mm)
818-20	Curved-Claw Hammer - Heavy-Duty	20 oz (567 g)	14" (356 mm)

