




- A | Ergonomic handle design for increased comfort
- B | Light weight composite body
- C | Rear exhaust silencer
- D | Safety throttle lever
- E | Convenient spindle lock
- F | Swiveling wheel guard
- G | Vibration absorbing handle
- H | Tool less wheel nut (available only on 526345)

AG ERGO GRIP ANGLE GRINDERS

- Speed regulating governor maintains constant speed and torque control while grinding and prevents over-speed with free running
- Light weight composite body
- Wheel guard adjusts to 9 different positions without tools
- Vibration absorbing handle allows longer use without operator fatigue
- Quiet operation. Grinder operates at 79db
- Throttle lever features automatic lock for added safety
- Heavy Duty ball bearing construction for vibration free performance
- Durable precision machined and hardened steel gears
- Grinding wheel not included

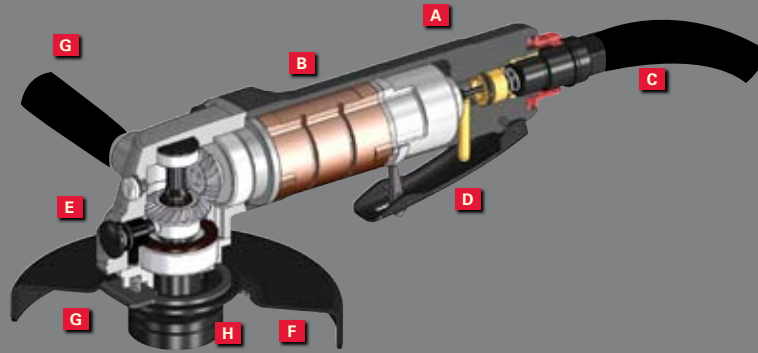

SPECIFICATIONS

STOCK NUMBER	MODEL NUMBER	WHEEL SIZE (DIA X BORE X THK/IN)	SPINDLE THREAD (IN/TPI)	HORSE POWER (HP)	FREE SPEED (RPM)	AIR PRESSURE (PSI)	AIR CONSUMP. (CFM)	AIR INLET (NPT/IN)	AIR HOSE (ID/IN)	VIBRATION VALUE (M/S2)	OVERALL LENGTH (IN)	NOISE LEVEL (DB)	WEIGHT (LBS)
526340	AG-4S	4 x 5/8 x 1/4	3/8-24	3/4	10000	90	4	1/4	3/8	0.65	9	83	9-3/4
526345	AG-4.5S	4.5 x 5/8 x 1/4	5/8-11	3/4	10000	90	4	1/4	3/8	0.65	9	83	10

JSG ANGLE GRINDERS

- Heavy Duty ball bearing construction
- Durable precision machined and hardened steel gears
- Rugged aluminum alloy housing with steel wheel guards
- Features safety lock throttle and dead handles
- Grinding wheel not included



SPECIFICATIONS

STOCK NUMBER	WHEEL SIZE (DIA X BORE X THK/IN)	SPINDLE THREAD (IN/TPI)	HORSE POWER (HP)	FREE SPEED (RPM)	AIR PRESSURE (PSI)	AIR CONSUMP. (CFM)	AIR INLET (NPT/IN)	AIR HOSE (ID/IN)	VIBRATION VALUE (M/S2)	OVERALL LENGTH (IN)	NOISE LEVEL (DB)	WEIGHT (LBS)
JSG-0522	7 x 7/8 x 1/4	5/8-11	1	7000	90	7	1/4	3/8	2.6	14	108	7.01
JSM-619	4 x 5/8 x 1/4	3/8-24	1/2	11,000	90	4	1/4	3/8	2.7	6-3/4	96	3.75
JSM-619SB	5 x 5/8 x 1/4	5/8-11	1/2	11,000	90	4	1/4	3/8	2.7	6-3/4	96	3.86

JNS ANGLE GRINDER

- Built In regulator for speed control
- Features safety lock throttle and dead handle
- Soft molded grip for increased comfort



SPECIFICATIONS

STOCK NUMBER	WHEEL SIZE (DIA X BORE X THK/IN)	SPINDLE THREAD (IN/TPI)	HORSE POWER (HP)	FREE SPEED (RPM)	AIR PRESSURE (PSI)	AIR CONSUMPTION (CFM)	AIR INLET (NPT/IN)	AIR HOSE (ID/IN)	VIBRATION VALUE (M/S2)	OVERALL LENGTH (IN)	NOISE LEVEL (DB)	WEIGHT (LBS)
JNS-185	4 x 5/8 x 1/4	3/8-24	1/4	11,000	90	4	1/4	3/8	2.7	6-3/4	96	3